



# MARETTI LIGHTING



Maretti Lighting  
Bolderweg 7

1332 AX Almere  
the Netherlands

T +31 (0) 36 532 66 12  
F +31 (0) 36 532 17 35

E info@maretti.com  
W www.maretti.com

Maretti Lighting is well-known in the World of interior design. In businesses, homes, store chains, and hospitality facilities all over the world, Maretti is an unmistakable presence with its project lighting that does more than just provide light. We make lighting an essential part of the interior. Maretti stands for stylish top quality and trendsetting design, modern, timeless and most of all, original.

Maretti Lighting works with all the top brands in the lighting industry, but we are especially notable for our own large product line and introduce our own brand name "Maretti". Our production team distinguishes itself time and time again with unique innovations from our own atelier and therefore our projects exude an entirely unique identity.

© Copyright Maretti Projectverlichting.

Our IM was made with the greatest of care. Nevertheless, the colours displayed in the IM may differ slightly from the real colours because of the printing process. Colour, size and range are subject to change. Nothing from this IM may be copied, reproduced and/or published by print, photocopy or in any other way without Maretti Lighting's written permission. All product and design copyrights belong to Maretti Lighting.

#### GUARANTEE TERMS AND CONDITIONS

The other party should inspect the delivered items immediately upon receipt with regard to its soundness. Entitlements to repair or replacement only exist if the other party

- In the case of visible defects, informs MPV of them immediately.



- In the case of defects that are not visible, informs MPV in writing of the defects, within 2 working days after the day the defects were found, or in all reason could have been found and furthermore demonstrates that the MPV instructions for use, maintenance and operation were followed, whilst the defects are not the consequence of normal wear and tear, misuse, negligence, accident, exceeding the limits prescribed by the MPV or by the legal safety regulations, or, in the case of a repair or change without MPV's consent or the consent of its recognised repairer, there will be no entitlement to repairs or replacement. The parts that have to be replaced must be made available free of charge to MPV. Noncompliance by the other party to one or more of its obligations will release MPV of all its guarantee obligations. In the case of assembly of the other party's own products by Maretti, MPV will release itself from all guarantee stipulations. Moreover, our general delivery terms and conditions are applicable. These can be obtained from Maretti or can be downloaded from [www.maretti.com](http://www.maretti.com)

The installation must be done by a competent installer. Maretti recommends that your (outside) lighting and fixture annually to be inspected and maintain.

D: Für Garantiebedingungen bitte lesen Sie unsere Webseite [www.maretti.com](http://www.maretti.com)  
E: Consulte nuestro sitio web para las condiciones de garantía [www.maretti.com](http://www.maretti.com)  
FR: Consultez notre site web pour les conditions de garantie [www.maretti.com](http://www.maretti.com)  
NL: Voor garantievoorwaarden zie onze website [www.maretti.com](http://www.maretti.com)

|            |         |        |
|------------|---------|--------|
| 10.9005.05 | Length: | 150mm  |
| 10.9010.05 | Length: | 300mm  |
| 10.9015.05 | Length: | 600mm  |
| 10.9020.05 | Length: | 900mm  |
| 10.9025.05 | Length: | 1000mm |
| 10.9030.05 | Length: | 1200mm |

## CONNECT LINE GENERAL INSTRUCTION MANUAL INSTRUCTIONS 1/5



|             |            |            |            |            |            |            |
|-------------|------------|------------|------------|------------|------------|------------|
| Art. nr.:   | 10.9005.05 | 10.9010.05 | 10.9015.05 | 10.9020.05 | 10.9025.05 | 10.9030.05 |
| Length (X): | 150mm      | 300mm      | 600mm      | 900mm      | 1000mm     | 1200mm     |



| GENERAL INFORMATION |                   |    |                     |             |                        |  |          |
|---------------------|-------------------|----|---------------------|-------------|------------------------|--|----------|
| DC 24V              | VOLTAGE           | 20 | IP                  |             | DEGREE BEAM ANGLE 100° |  | DIMMABLE |
| 2700                | KELVIN            |    | INDOOR              | 40000 hours | LIFETIME LED           |  | CE MARK  |
|                     | LED BULB INCLUDED |    | DRIVER NOT INCLUDED | Ra82        | CRI                    |  |          |

| ART. NR.:    | 10.9005.05  | 10.9010.05  | 10.9015.05   | 10.9020.05   | 10.9025.05   | 10.9030.05   |
|--------------|-------------|-------------|--------------|--------------|--------------|--------------|
| WATTAGE      | 3W          | 5W          | 9W           | 14W          | 15W          | 17W          |
| LUMEN        | 180 lm      | 300 lm      | 540 lm       | 840 lm       | 900 lm       | 1020 lm      |
| END CAPS     | 2x caps     | 2x caps     | 2x caps      | 2x caps      | 2x caps      | 2x           |
| MOUNT. CLIPS | 1x180° clip | 1x180° clip | 2x180° clips | 2x180° clips | 2x180° clips | 2x180° clips |

# CONNECT LINE GENERAL INSTRUCTION MANUAL


## MOUNTING INSTRUCTIONS 2/5

**CONNECT LINE ACCESSORIES (ORDERED SEPARATELY)**

|                   |    |              |                           |                         |
|-------------------|----|--------------|---------------------------|-------------------------|
| <b>10.9040.14</b> | 01 | CONNECT LINE | 180° mounting clip        | Incl screws             |
| <b>10.9045.14</b> | 02 | CONNECT LINE | 45° mounting clip         | Incl screws             |
| <b>10.9055.00</b> | 03 | CONNECT LINE | Magnetic Mounting Kit     | L.30 x B.17 x H.1mm     |
| <b>10.9065.05</b> | 04 | CONNECT LINE | Middle connector          |                         |
| <b>10.9070.05</b> | 05 | CONNECT LINE | Input Power               | 50cm cable excl. switch |
| <b>10.9075.05</b> | 06 | CONNECT LINE | Dimswitch                 | 50cm cable              |
| <b>10.9080.05</b> | 07 | CONNECT LINE | Sensorswitch              | 50cm cable              |
| <b>10.9085.05</b> | 08 | CONNECT LINE | Connecting Cable 50cm     | for 2 Connect Lines     |
| <b>10.9090.05</b> | 09 | CONNECT LINE | Adapter Junction Cable    | 4x output               |
| <b>10.9095.05</b> | 10 | CONNECT LINE | Extension Cable           | 100cm                   |
| <b>10.9100.05</b> | 11 | CONNECT LINE | Corner connector left     | (2 connections)         |
| <b>10.9105.05</b> | 12 | CONNECT LINE | Corner connector right    | (2 connections)         |
| <b>10.9110.05</b> | 13 | CONNECT LINE | Connector 4-way           | (4 connections)         |
| <b>10.9115.05</b> | 14 | CONNECT LINE | T-connector               | (3 connections)         |
| <b>10.9120.05</b> | 15 | CONNECT LINE | Corner connector          | (1 connections)         |
| <b>10.9125.04</b> | 16 | CONNECT LINE | Adapter 60W 24V 2.5A      | PF 0.5                  |
| <b>10.9130.04</b> | 17 | CONNECT LINE | Adapter 120W 24V 5A       | PF 0.9                  |
| <b>10.9200.05</b> | 18 | CONNECT LINE | Remote control & receiver |                         |

|            |            |
|------------|------------|
| 10.9005.05 | 10.9020.05 |
| 10.9010.05 | 10.9025.05 |
| 10.9015.05 | 10.9030.05 |

This luminaire contains built-in LED lamps.




The lamps cannot be changed in the luminaire.

874/2012

| length / wattage | Quantity of max. connected lengths |     |     |     |     |     |     |
|------------------|------------------------------------|-----|-----|-----|-----|-----|-----|
|                  | 1                                  | 2   | 3   | 4   | 5   | 6   | 7   |
| 15cm / 3W        | 3W                                 | 6W  | 9W  | 12W | 15W | 18W | 21W |
| 30cm / 5W        | 5W                                 | 10W | 15W | 20W | 25W | 30W | 35W |
| 60cm / 9W        | 9W                                 | 18W | 27W | 36W | 45W | 54W | 63W |
| 90cm / 14W       | 14W                                | 28W | 42W | 56W | 70W | 84W |     |
| 100cm / 15W      | 15W                                | 30W | 45W | 60W | 75W | 90W |     |
| 120cm / 17W      | 17W                                | 34W | 51W | 68W | 85W |     |     |

### MAX. 90W TOTAL CONNECTED PROFILES

- Perfect lighting distribution.
- Super slim LED bar.
- Quick connection system between the Connect line products.
- Six kinds of lengths available.
- Various installation methods.
- Adapters DC24V-12V (separate order):
  - 60W 24V 2.5A (power factor 0.5)
  - 120W 24V5A (power factor 0.9)
- Full set of accessories for various solutions (separate order).

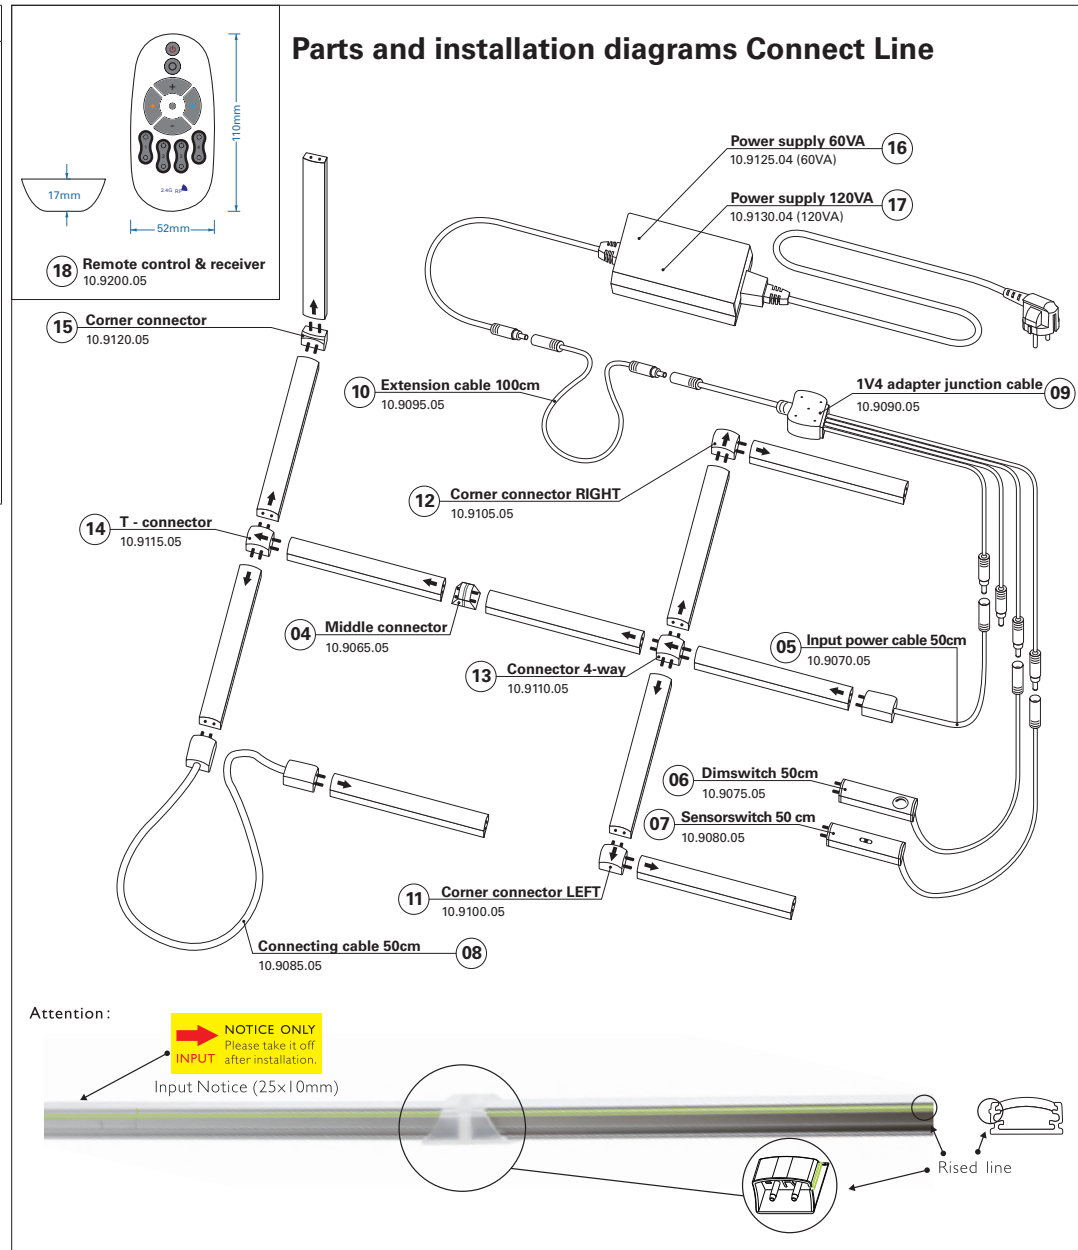

"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."

# CONNECT LINE GENERAL INSTRUCTION MANUAL

## MOUNTING INSTRUCTIONS 3/5

### DESCRIPTION FOR REMOTE CONTROL:

2.4G RF Transmission Technology  
4-Zones Remote Control  
Size: 110 x 52 x 17mm  
Power: 2x AAA Battery (Not included)  
Material: ABS  
Control distance: 5~15meter  
Control qty: Countless, but only 4 groups  
Colour temperature change: N/A  
Brightness adjust  
Group control multiple lights



Before you use the remote controller, please make sure 2 pcs of AAA batteries are properly placed inside the remote controller.  
The 'Master On' or 'Master Off' can control all the lights in different zones, but 'Zone On' and 'Zone Off' button are in selected area only.

### A. Linking new lights to the remote controls

1. Choose a zone you want to assign the light(1 to 4 any zone)
2. Switch off the main power supply of the selected light bar zone with the main switch or unplug the socket.
3. Then switch on the light bar again, within 3 second press one of the zone 'on' button on the remote controller and don't let go.
4. Within 3 second, when this connecting set up is successful, the light bar will blink 3 times on and off.
- Then Switch off the main power supply of the light bar, after 10 second, switch on the light bar again, the connecting established successfully.
5. If the light is not connecting successful, repeat the above action

### B. Disconnecting the light

1. Check via the remote control to see which zone(1~4 any zone) is already linked to the light.
2. After checked, switch off the main power supply of the light bar with the main switch or unplug the socket.
3. Then switch on the light bar again, within 3 second press the 'Master ON' button on the remote control and don't let go.
4. Within 3 second, when the disconnect operation is successful, the light will quickly blinks 6 times ON and OFF.
5. If the light is not disconnecting successful, repeat the above action

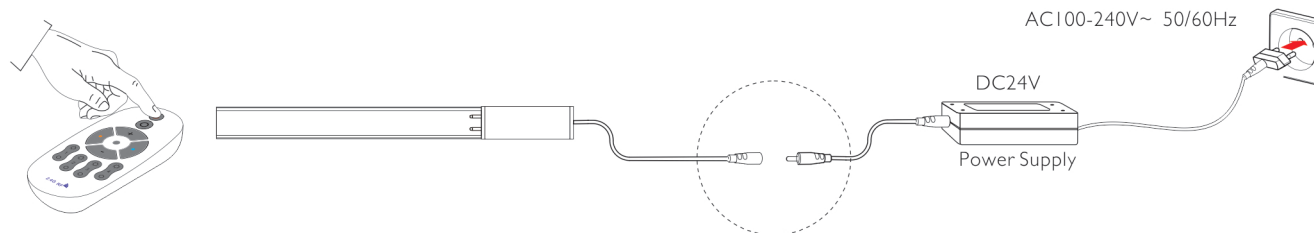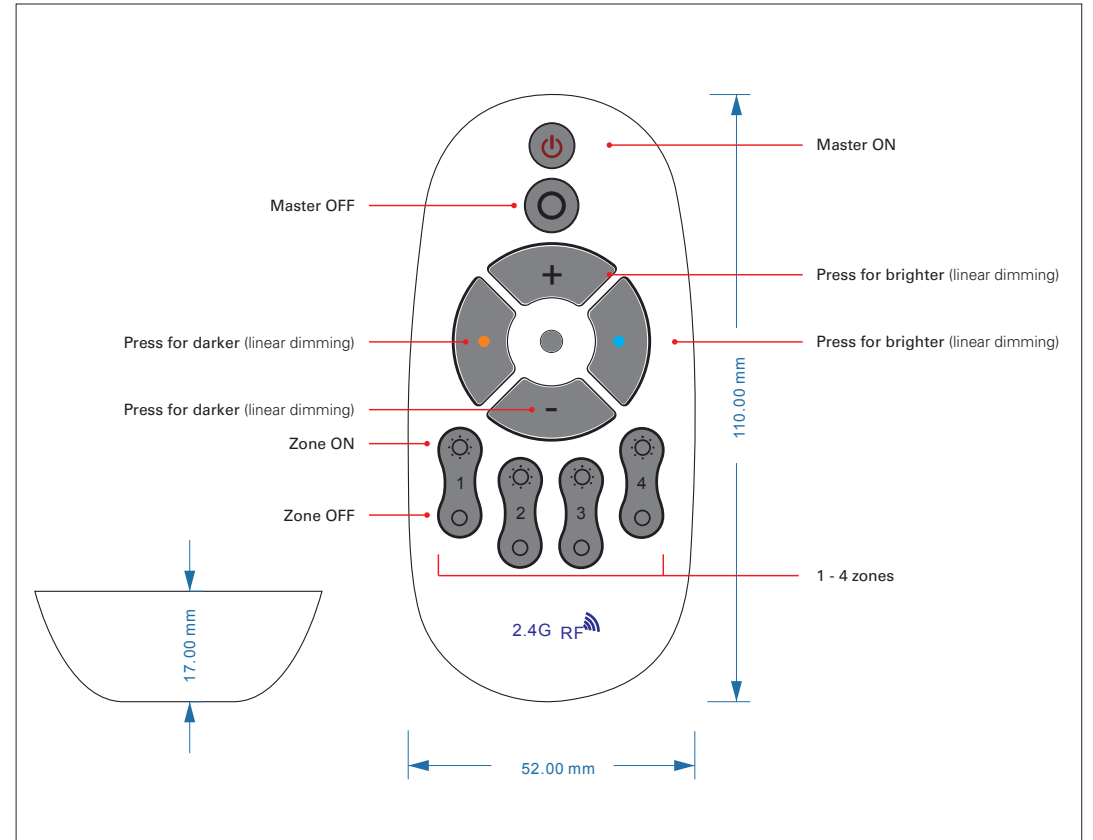

"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."



# CONNECT LINE GENERAL INSTRUCTION MANUAL

## MOUNTING INSTRUCTIONS 4/5

### How to fix the Connect line:

There are many ways to fix the Connect lines products.


#### 1) Install the Connect line with the mounting clips

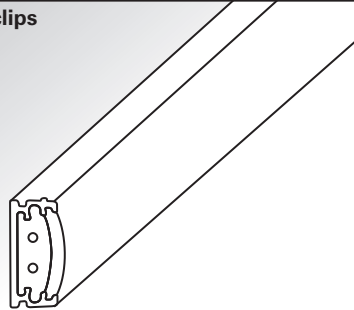

This accessory is included but it can also be ordered separately.  
(Art. nr.: 10.9040.14, separate ordered)

1. Make sure to install the clips in a line, in proper distance.
2. Use the screws to fix the clips and then install the Connect line into the clips.


#### 2) Install the Connect line with 3M adhesives.

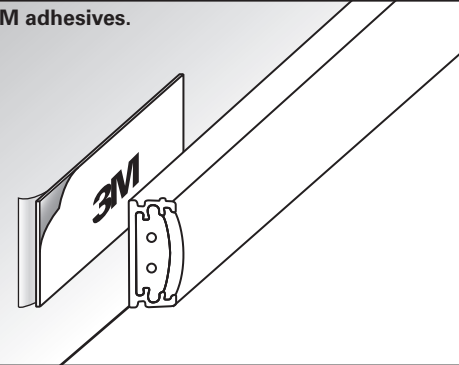

1. Stick the 3M adhesive on the back of the Connect line in a proper distance between each one.
2. Paste the Connect line on the place to be installed.

#### 3) Install the Connect line with the nr.: 03 Magnetic mounting kit.

(Art. nr.: 10.9055.00, separate ordered)


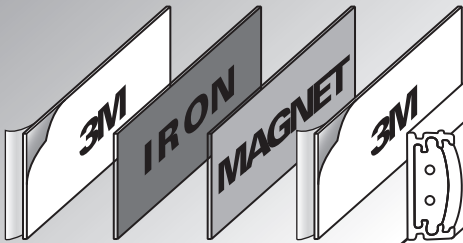


Content Magnetic mounting kit:  
1x Magnetic plate  
1x Iron plate  
2x 3M mounting tape

1. Stick the Magnetic plate on the back of the Connect line with the 3M adhesive in a proper distance.
2. Put the Iron plate on the Magnetic plate and then paste the Connect line on the place to be installed.

#### Install the Connect line with the nr.: 02 45° mounting clip

(Art. nr.: 10.9045.14, separate ordered)

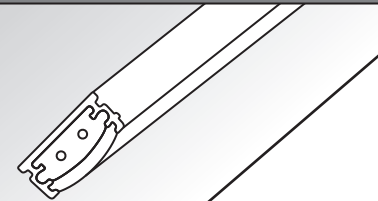

1. Make sure to install the 45° clips in a line, in proper distance (separate ordered).
2. Use the screws to fix the clips and then install the Connect line into the clips.



#### LET OP:

- Volg en bewaar deze gebruiksaanwijzing.
- Zorg ervoor dat de netspanning uitgeschakeld is voor installatie of onderhoud.  
(Installatie en onderhoud uitsluitend door gekwalificeerde personen).
- Gebruik het armatuur alleen binnenshuis.
- Het armatuur niet in vochtige of natte ruimte gebruiken.

De fabrikant aanvaardt geen enkele aansprakelijkheid voor letsel of schade als gevolg van een verkeerde toepassing van het armatuur. Als er schade aan elektrische onderdelen te vinden zijn, vraag dan een elektricien om het te vervangen.

#### Onderhoud is behoud:

Een goede instandhouding van het armatuur is sterk afhankelijk van omgevings- en onderhoudsfactoren. Hierop kunnen wij geen invloed uitoefenen.

- Schakel voor de zekerheid de elektriciteit uit!
- Gebruik geen bijtende, chemische middelen of schurende schoonmaakmiddelen.

#### NOTE:

- Follow and keep this instructions manual.
- Make sure that the mains voltage is switched off for installation or maintenance.  
(Installation and maintenance only by qualified persons).
- Use the fixture only indoors.
- Don't use the fixture in humid or wet areas.

The manufacturer accepts no liability for any injuries or damages resulting from the incorrect use or installation of the fixture. If you find any damage to the electrical parts, please ask a qualified electrician to replace it.

#### Maintenance is preservation:

A good preservation of the fixture is highly dependent on environmental factors and maintenance. We cannot exercise any influence on this.

- Make sure that the mains voltage is switched off before you begin.
- Do not use strong, chemicals or abrasive cleaners.

# CONNECT LINE GENERAL INSTRUCTION MANUAL

## MOUNTING INSTRUCTIONS 5/5

### Connectors and extension cables can be easily connected

With our various range of connectors you can realize different kinds of corner linking


1. When using corner connector or middle connector, please notice the mark on them.
2. When linking two bars with a connector, the current must go in the input first (as shown beside).
3. Contact voltage circuit design support 6m link with tiny light difference
4. Please pay attention to the input notice tag when you install the lamp.



After having finished installing, please remove it together with the film membrane on the plastic cover.




**04 Middle connector 4-way (nr.: 04)**  
Art. nr.: 10.9065.05, separate ordered




**11 Corner connector LEFT (nr.: 11)**  
Art. nr.: 10.9100.05, separate ordered




**12 Corner connector RIGHT (nr.: 12)**  
Art. nr.: 10.9105.05, separate ordered



**13 Connector 4-way (nr.: 13)**  
Art. nr.: 10.9110.05, separate ordered




**14 T-connector (nr.: 14)**  
Art. nr.: 10.9115.05, separate ordered




**15 Corner connector (nr.: 15)**  
Art. nr.: 10.9120.05, separate ordered

Extension cable: By below cables, the Connect line can be used in any installation situation



**Connecting cable 50cm (nr.: 08)**  
Art. nr.: 10.9085.05, separate ordered  
To connect two Connect line bars together when there is a distance between them.



**1V4 Adapter junction cable (nr.: 09)**  
Art. nr.: 10.9090.05, separate ordered  
Support 4 lines output while 1 power input.



**Extension cable 100cm (nr.: 10)**  
Art. nr.: 10.9095.05, separate ordered  
To add the distance between the power and the switch.

### Adapters and switches

**Input power cable 50cm (nr.: 05)**  
Art. nr.: 10.9070.05, separate ordered

**Adapter 60W 24V 2.5A (nr.: 16)**  
Art. nr.: 10.9125.04, separate ordered

**Adapter 120W 24V 5A (nr.: 17)**  
Art. nr.: 10.9130.04, separate ordered

Plug and play function.




**Dimswitch 50cm (nr.: 06)**

Art. nr.: 10.9075.05, separate ordered

Plug and play function.

1. Press one time to turn on and keep your finger on the switch to dim smoothly from 0% ~ 100%. Remove your finger to stop dimming. Press twice quickly to turn off. (like below drawing method 1.)
2. Press one time to turn on and press one by one separately to dim from 25%~50%~75% to 100%. Remove your finger to stop dimming. Press twice quickly to turn off. (like below drawing method 2.)




**Sensorswitch 50cm (nr.: 07)**

Art. nr.: 10.9080.05, separate ordered

Plug and play function.

Wave your hand within 15cm of this switch to turn on and off.



Method 1.



Method 2.

