



Maretti Lighting
Bolderweg 7

1332 AX Almere
the Netherlands

T +31 (0) 36 532 66 12

E info@maretti.com
W www.maretti.com

Maretti Lighting is well-known in the World of interior design. In businesses, homes, store chains, and hospitality facilities all over the world, Maretti is unmistakable present with its project lighting that does more than just provide light. We make lighting an essential part of the interior. Maretti stands for stylish top quality and trendsetting design, modern, timeless and most of all, original.

Maretti Lighting works with all the top brands in the lighting industry, but we are especially notable for our own large product line and introduce our own brand name "Maretti". Our production team distinguishes itself time and time again with unique innovations from our own atelier and therefore our projects exude an entirely unique identity.

© Copyright Maretti Projectverlichting.

Our IM was made with the greatest of care. Nevertheless, the colours displayed in the IM may differ slightly from the real colours because of the printing process. Colour, size and range are subject to change. Nothing from this IM may be copied, reproduced and/or published by print, photocopy or in any other way without Maretti Lighting's written permission. All product and design copyrights belong to Maretti Lighting.

GUARANTEE TERMS AND CONDITIONS

The other party should inspect the delivered items immediately upon receipt with regard to its soundness. Entitlements to repair or replacement only exist if the other party

- In the case of visible defects, informs MPV of them immediately.

- In the case of defects that are not visible, informs MPV in writing of the defects, within 2 working days after the day the defects were found, or in all reason could have been found and furthermore demonstrates that the MPV instructions for use, maintenance and operation were followed, whilst the defects are not the consequence of normal wear and tear, misuse, negligence, accident, exceeding the limits prescribed by the MPV or by the legal safety regulations, or, in the case of a repair or change without MPV's consent or the consent of its recognised repairer, there will be no entitlement to repairs or replacement. The parts that have to be replaced must be made available free of charge to MPV. Noncompliance by the other party to one or more of its obligations will release MPV of all its guarantee obligations. In the case of assembly of the other party's own products by Maretti, MPV will release itself from all guarantee stipulations. Moreover, our general delivery terms and conditions are applicable. These can be obtained from Maretti or can be downloaded from www.maretti.com

The installation must be done by a competent installer. Maretti recommends that your (outside) lighting and fixtures are inspected and maintained annually.

D: Für Garantiebedingungen bitte lesen Sie unsere Webseite
E: Consulte nuestro sitio web para los condiciones de garantía
FR: Consultez notre site web pour les conditions de garantie
NL: Voor garantievooraardien zie onze website

www.maretti.com
www.maretti.com
www.maretti.com
www.maretti.com


11.1789.COLOUR 1L
11.1791.COLOUR 2L

BERGAMO RECESSED CTA

1/5



BLACK
04

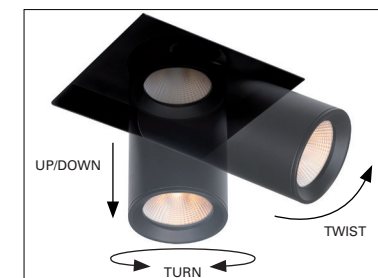

MAX. 20W	MAX. WATTAGE	 CTA	CTA DIM. 2000-2700K	IP20	IP RATING		2-PINS PLUG & PLAY	<0,5s	LAMP WARM UP
	DRIVER NOT INCLUDED	Ra95	CRI	36°	BEAM ANGLE		2-PINS CABLE 300mm	99-99,5 %	1000H MAIN TENANCE
	6,3W P&P LED MODULE INCL.	1x450 2x450	LUMEN 1L LUMEN 2L	 75°	SPOT TWISTING		INSTALLATION KIT NOT INCL.		CE MARK
350mA	AMPERAGE		INDOOR	 359°	SPOT TURN	50.000	LIFETIME LED		

11.1789.COLOUR 1L
11.1791.COLOUR 2L

BERGAMO RECESSED CTA

2/5

VERSTELBARE MONTAGEKIT: APART VERKRIJGBAAR / ADJUSTABLE INSTALLATION KIT: SEPARATE ORDER

ART. NR.	NAAM / NAME	TE GEBRUIKEN VOOR / TO USE FOR	KLEUR / COLOUR
11.1836.05.A	VERSTELBARE MONTAGEKIT / ADJUSTABLE INSTALLATION KIT	1 LIGHT	WIT / WHITE
11.1837.04	VERSTELBARE MONTAGEKIT / ADJUSTABLE INSTALLATION KIT	2 LIGHT	ZWART / BLACK

LICHTBRON: APART VERKRIJGBAAR / LIGHT BULB: SEPARATE ORDER

ART. NR.	NAAM / NAME	SOCKET	WATTAGE	MILIAMPER	KELVIN	LUMEN	CRI	BUNDELHOEK / BEAM ANGLE
21.8361.02 (INCL.)	Cuba 50 LED module CTA	2 pins P&P	6,3W	350mA	CTA 2000-2700K	450 lm	Ra95	36°
21.8366.02	Cuba 50 LED module	2 pins P&P	6,3W	350mA	2700K	450 lm	Ra92	36°

DRIVERS: APART VERKRIJGBAAR / SEPARATE ORDER

ART. NR.	NAAM / NAME	WATTAGE	MILIAMPER	DIMMEN / DIMMING	AANSLUITING / CONNECTION	AANTAL LICHTBRONNEN / NUMBER OF LIGHT BULBS
16.8101.0350.E*	DRIVER P&P 30-42V	10,5W – 14,7W	350mA	Trailing edge /Triac DIM.	2m kabel eurostekker	2*
16.8101.0350.G*	DRIVER P&P 30-42V	10,5W – 14,7W	350mA	Trailing edge /Triac DIM.	2m kabel GST18	2*
16.8101.0350.W*	DRIVER P&P 30-42V	10,5W – 14,7W	350mA	Trailing edge /Triac DIM.	2m kabel WINSTA	2*
16.8103.0350.E*	DRIVER P&P 15-21V	5,25W – 7,35W	350mA	Trailing edge DIM.	2m kabel eurostekker	1
16.8103.0350.G*	DRIVER P&P 15-21V	5,25W – 7,35W	350mA	Trailing edge DIM.	2m kabel GST18	1
16.8103.0350.W*	DRIVER P&P 15-21V	5,25W – 7,35W	350mA	Trailing edge DIM.	2m kabel WINSTA	1
16.7000.0350.G*	DRIVER P&P DALI INTEL	0,9W – 10W	350mA	CTA/AM DIM.	GST18	1
16.7000.0350.W*	DRIVER P&P DALI INTEL	0,9W – 10W	350mA	CTA/AM DIM.	WINSTA	1
16.7000.0350.Z*	DRIVER P&P DALI INTEL	0,9W – 10W	350mA	CTA/AM DIM.	excl. prim. connector	1
16.7002.0350.G*	DRIVER P&P DALI INTEL	4W – 18,9W	350mA	CTA/AM DIM.	GST18	2*
16.7002.0350.W*	DRIVER P&P DALI INTEL	4W – 18,9W	350mA	CTA/AM DIM.	WINSTA	2*
16.7002.0350.Z*	DRIVER P&P DALI INTEL	4W – 18,9W	350mA	CTA/AM DIM.	excl. prim. connector	2*

* CONNECTION BLOCK FOR 2 CUBA 50 LED MODULE APART VERKRIJGBAAR / SEPARATE ORDER

ART. NR.	NAAM / NAME	INFO.
70.7115.05	CONNECTION BLOCK 3-V SERIES	P&P MALE + 2x70.7120.05 LED BRIDGE

PLUG & PLAY CABLES APART VERKRIJGBAAR / SEPARATE ORDER

ART. NR.	NAAM / NAME	AFMETINGEN / DIMENSIONS
70.7125.05	LED KOPPELKABEL / LED COUPLING CABLE	L: 50cm 2x0,5mm ² mini amp for mA led
70.7127.05	LED KOPPELKABEL / LED COUPLING CABLE	L:100cm 2x0,5mm ² mini amp for mA led
70.7130.05	LED KOPPELKABEL / LED COUPLING CABLE	L:150cm 2x0,5mm ² mini amp for mA led



LET OP:

- Volg en bewaar deze gebruiksaanwijzing.
- Zorg ervoor dat de netspanning uitgeschakeld is voor installatie, reparatie of onderhoud. (Installatie, reparatie en onderhoud uitsluitend door gekwalificeerde personen).
- Voor reparatie of onderhoud uitsluitend originele delen gebruiken.
- Gebruik het armatuur alleen binnenshuis. Het armatuur niet in vochtige of natte ruimte gebruiken.
- Uitsluitend op het etiket aangegeven lichtbronnen gebruiken.

Wanneer u een spot inbouwt moet u rekening houden met de warmte en dus rekening houden met extra inbouwruimte rond je armatuur om eventuele schade te voorkomen.

De fabrikant aanvaardt geen enkele aansprakelijkheid voor letsel of schade als gevolg van een verkeerde toepassing van het armatuur. De fabrikant aanvaardt geen garantie in geval van het niet behouden van de lampen volgens de richtlijnen van de fabrikant. Als er schade aan elektrische onderdelen te vinden zijn, vraag dan een elektricien om het te vervangen.

Onderhoud is behoud:

- Een goede instandhouding van het armatuur is sterk afhankelijk van omgevings- en onderhoudsfactoren. Hierop kunnen wij geen invloed uitoefenen.
- Schakel voor de zekerheid de elektriciteit uit!
- Gebruik geen bijtende, chemische middelen of schurende schoonmaakmiddelen. Gebruik geen bijtende, chemische of schurende schoonmaakmiddelen.

NOTE:

- Follow and keep this instructions manual.
- Make sure that the mains voltage is switched off for installation, repair or maintenance. (Installation, repair and maintenance only by qualified persons).
- Use only original parts for repairs or maintenance.
- Use the fixture only indoors. Don't use the fixture in humid or wet areas.
- Use only suitable light sources indicated on the label.

Make sure you have at least as much space in your (false) ceiling. It is very important to give enough air cooling to avoid any damage.

The manufacturer accepts no liability for any injuries or damages resulting from the incorrect use or installation of the fixture. Any operation performed on the fixture that is not in accordance with instructions will void manufacturer's warranty. If you find any damage to the electrical parts, please ask a qualified electrician to replace it.

Maintenance is preservation:

- A good preservation of the fixture is highly dependent on environmental factors and maintenance. We cannot exercise any influence on this.
- Make sure that the mains voltage is switched off before you begin.
- Do not use strong, chemicals or abrasive cleaners.



*

E: Europlug

G: GST18

W: Winsta

Z: Geen plug



"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."

MOUNTING INSTRUCTIONS IN LOWERED CEILING

Schakel altijd eerst de stroom uit voordat u installatie-, onderhoud of reparatiewerkzaamheden uitvoert.

Always switch off the mains voltage before carrying out installation, maintenance and repair work.

VOORDAT U BEGINT / BEFORE YOU BEGIN

Opmerking!:
De verstelbare montagekit is noodzakelijk om het armatuur te monteren (het is apart te bestellen)

Note:
The adjustable installation kit is necessary to mount the fixture (to order separately)

PLAFOND / CEILING

MINIMALE RUIMTE 90mm
Verlaagd plafond meegerekend
MINIMAL SPACE 90mm
Lowered ceiling included

VERLAAGD PLAFOND / LOWERED CEILING

UITBREEKPOORT / BREAKOUT PORT

Voor de verstelbare montagekit met een uitbrekpoort: Als de ruimte tussen de beton plafond tot aan de onderkant van het verlaagd plafond minder dan 110mm, het is mogelijk om deze af te breken zodat je de driver door kunt schuiven. LET OP: u moet wel zorgen dat er genoeg ruimte is voor de driver, boven het verlaagd plafond (150mm horizontaal).

For the adjustable mounting kit with a breakout port: If the space between the concrete ceiling to the bottom of the suspended ceiling less than 110mm, it is possible to break this port so that you can slide the driver in. NOTE: you must ensure that there is enough space for the driver, above the suspended ceiling (150 mm horizontal).

Uitbrekpoort / Breakout port

Bij beperkte ruimte, de uitbrekpoort voor montage afbreken.
With limited space, break off the breakout port for installation

1 UITBREEKPOORT / BREAKOUT PORT

U kunt met dit uitleg beginnen als u de poort moet breken zo niet ga naar afbeelding 2.

You can start with this explanation if you have to break the port if no go to figure 2.

2

3

DRIVER

4

5

AFMETINGEN EN ZAAGMATEN / DIMENSIONS AND CUTTING SIZES

AFMETINGEN ARMATUREN / DIMENSIONS FIXTURES
BELANGRIJK! Het armatuur is hoger dan de montage kit.
IMPORTANT! The fixture is higher than the mounting kit.

L: 108xB: 108xH: 165mm

1-L 102mm 102mm 160mm 80mm

L: 215xB: 108xH: 165mm

2-L 208mm 102mm 160mm 80mm

AFMETINGEN KIT / DIMENSIONS KIT
Zaagmaten met verstelbare montagekit / Cutting sizes with adjustable installation kit
Opmerking: Deze kit is nodig om het product te kunnen installeren.
Note: This kit is needed to install the product. (kit niet inbegrepen / kit not included)

1-L

107 107 80

2-L

214 107 80

LED module vervangen
Replace LED module

Schakel altijd eerst de stroom uit voordat u installatie-, onderhoud of reparatiewerkzaamheden uitvoert.

Always switch off the mains voltage before carrying out installation, maintenance and repair work.

! LET OP:

- Volg en bewaar deze gebruiksaanwijzing.
- Zorg ervoor dat de netspanning uitgeschakeld is voor installatie, reparatie of onderhoud. (Installatie, reparatie en onderhoud uitsluitend door gekwalificeerde personen).
- Voor reparatie of onderhoud uitsluitend originele delen gebruiken.
- Gebruik het armatuur alleen binnenshuis. Het armatuur niet in vochtige of natte ruimte gebruiken.
- Uitsluitend op het etiket aangegeven lichtbronnen gebruiken.

Wanneer u een spot inbouwt moet u rekening houden met de warmte en dus rekening houden met extra inbouwruimte rond je armatuur om eventuele schade te voorkomen.

De fabrikant aanvaardt geen enkele aansprakelijkheid voor letsel of schade als gevolg van een verkeerde toepassing van het armatuur. De fabrikant aanvaardt geen garantie in geval van het niet behandelen van de lampen volgens de richtlijnen van de fabrikant. Als er schade aan elektrische onderdelen te vinden zijn, vraag dan een elektricien om het te vervangen.

Onderhoud is behoud:
Een goede instandhouding van het armatuur is sterk afhankelijk van omgevings- en onderhoudsfactoren. Hierop kunnen wij geen invloed uitoefenen.

- Schakel voor de zekerheid de elektriciteit uit!
- Gebruik geen bijtende, chemische middelen of schurende schoonmaakmiddelen. Gebruik geen bijtende, chemische of schurende schoonmaakmiddelen.

NOTE:



- Follow and keep this instructions manual.
- Make sure that the mains voltage is switched off for installation, repair or maintenance. (Installation, repair and maintenance only by qualified persons).
- Use only original parts for repairs or maintenance.
- Use the fixture only indoors. Don't use the fixture in humid or wet areas.
- Use only suitable light sources indicated on the label.

Make sure you have at least as much space in your (false) ceiling. It is very important to give enough air cooling to avoid any damage.

The manufacturer accepts no liability for any injuries or damages resulting from the incorrect use or installation of the fixture. Any operation performed on the fixture that is not in accordance with instructions will void manufacturer's warranty. If you find any damage to the electrical parts, please ask a qualified electrician to replace it.






Maintenance is preservation:
A good preservation of the fixture is highly dependent on environmental factors and maintenance. We cannot exercise any influence on this.

- Make sure that the mains voltage is switched off before you begin.
- Do not use strong, chemicals or abrasive cleaners.







MEASUREMENTS: CONCRETE BOXES (note: The boxes can't be ordered separately; as they are produced on order basis, price on request). See next page for more about concrete ceiling.

Measurements for the BARGAMO 1 LIGHT

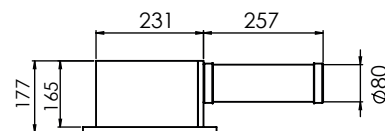

Measurements for the BARGAMO 2 LIGHTS

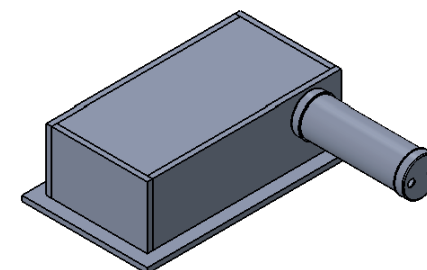

LET OP:

- Volg en bewaar deze gebruiksaanwijzing.
- Zorg ervoor dat de netspanning uitgeschakeld is voor installatie, reparatie of onderhoud. (Installatie, reparatie en onderhoud uitsluitend door gekwalificeerde personen).
- Voor reparatie of onderhoud uitsluitend originele delen gebruiken.
- Gebruik het armatuur alleen binnenshuis. Het armatuur niet in vochtige of natte ruimte gebruiken.
- Uitsluitend op het etiket aangegeven lichtbronnen gebruiken.

Wanneer u een spot inbouwt moet u rekening houden met de warmte en dus rekening houden met extra inbouwruimte rond je armatuur om eventuele schade te voorkomen. De fabrikant aanvaardt geen enkele aansprakelijkheid voor letsel of schade als gevolg van een verkeerde toepassing van het armatuur. De fabrikant aanvaardt geen garantie in geval van het niet behandelen van de lampen volgens de richtlijnen van de fabrikant. Als er schade aan elektrische onderdelen te vinden zijn, vraag dan een elektricien om het te vervangen.

Onderhoud is behoud:

- Een goede instandhouding van het armatuur is sterk afhankelijk van omgevings- en onderhoudsfactoren. Hierop kunnen wij geen invloed uitoefenen.
- Schakel voor de zekerheid de elektriciteit uit!
- Gebruik geen bijtende, chemische middelen of schurende schoonmaakmiddelen. Gebruik geen bijtende, chemische of schurende schoonmaakmiddelen.

NOTE:

- Follow and keep this instructions manual.
- Make sure that the mains voltage is switched off for installation, repair or maintenance. (Installation, repair and maintenance only by qualified persons).
- Use only original parts for repairs or maintenance.
- Use the fixture only indoors. Don't use the fixture in humid or wet areas.
- Use only suitable light sources indicated on the label.

Make sure you have at least as much space in your (false) ceiling. It is very important to give enough air cooling to avoid any damage.

The manufacturer accepts no liability for any injuries or damages resulting from the incorrect use or installation of the fixture. Any operation performed on the fixture that is not in accordance with instructions will void manufacturer's warranty. If you find any damage to the electrical parts, please ask a qualified electrician to replace it.

Maintenance is preservation:

- A good preservation of the fixture is highly dependent on environmental factors and maintenance. We cannot exercise any influence on this.
- Make sure that the mains voltage is switched off before you begin.
- Do not use strong, chemicals or abrasive cleaners.

"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."

MOUNTING INSTRUCTIONS IN CONCRETE CEILING

1

2

Use the concrete stamp to support the box. You can remove the concrete stamp when the concrete is completely dried out

Concrete stamp

3

Remove the construction

4

5

NOTE: See page 3 of the instruction manual for mounting instructions of the fixture and the adjustment kit

6

Put the driver into the PVC tube.

Hight depends on the hight of the stucco

7

PLASTER



LET OP:
Lees A.U.B. aandachtig de veiligheidsvoorschriften op pagina 3

NOTE:
Please read carefully the safety warnings in page 3

"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."