



MARETTI

L I G H T I N G



Maretti Lighting
Bolderweg 7

1332 AX Almere
the Netherlands

T +31 (0) 36 532 66 12

E info@maretti.com
W www.maretti.com

Maretti Lighting is well-known in the World of interior design. In businesses, homes, store chains, and hospitality facilities all over the world, Maretti is unmistakable present with its project lighting that does more than just provide light. We make lighting an essential part of the interior. Maretti stands for stylish top quality and trendsetting design, modern, timeless and most of all, original.

Maretti Lighting works with all the top brands in the lighting industry, but we are especially notable for our own large product line and introduce our own brand name "Maretti". Our production team distinguishes itself time and time again with unique innovations from our own atelier and therefore our projects exude an entirely unique identity.

© Copyright Maretti Projectverlichting.

Our IM was made with the greatest of care. Nevertheless, the colours displayed in the IM may differ slightly from the real colours because of the printing process. Colour, size and range are subject to change. Nothing from this IM may be copied, reproduced and/or published by print, photocopy or in any other way without Maretti Lighting's written permission. All product and design copyrights belong to Maretti Lighting.

GUARANTEE TERMS AND CONDITIONS

The other party should inspect the delivered items immediately upon receipt with regard to its soundness. Entitlements to repair or replacement only exist if the other party

- In the case of visible defects, informs MPV of them immediately.

- In the case of defects that are not visible, informs MPV in writing of the defects, within 2 working days after the day the defects were found, or in all reason could have been found and furthermore demonstrates that the MPV instructions for use, maintenance and operation were followed, whilst the defects are not the consequence of normal wear and tear, misuse, negligence, accident, exceeding the limits prescribed by the MPV or by the legal safety regulations, or, in the case of a repair or change without MPV's consent or the consent of its recognised repairer, there will be no entitlement to repairs or replacement. The parts that have to be replaced must be made available free of charge to MPV. Noncompliance by the other party to one or more of its obligations will release MPV of all its guarantee obligations. In the case of assembly of the other party's own products by Maretti, MPV will release itself from all guarantee stipulations.

Moreover, our general delivery terms and conditions are applicable. These can be obtained from Maretti or can be downloaded from www.maretti.com

The installation must be done by a competent installer. Maretti recommends that your (outside) lighting and fixtures are inspected and maintained annually.

D: Für Garantiebedingungen bitte lesen Sie unsere Webseite
E: Consulte nuestro sitio web para los condiciones de garantía
FR: Consultez notre site web pour les conditions de garantie
NL: Voor garantievoorwaarden zie onze website

www.maretti.com
www.maretti.com
www.maretti.com
www.maretti.com

21.8070.82.E

PALOMA 111 LED P&P AR111



36V DC	VOLTAGE	P&P	FITTING	50.000 uren	LEVENSDUUR LED	<14	UGR RATING		
12.6W	WATTAGE	750 lm	LUMEN ∠ 90°	<0,5s	OPWARMTIJD TOT 60%	-30~ +40°C	OMGEVINGS- TEMPERATUUR		
350 mA	MILLIAMPERE		CTA 2000-3000K met drivers z.o.z.	99- 99.5%	LUMEN- BEHOUD		CE MARK		
	LED LICHTBRON	Ra98	CRI		GRADEN BUNDEL 24°				




MARETTI


L I G H T I N G

DRIVERS ZIJN APART VERKRIJGBAAR / SEPARATE ORDER



ARTI. NR.	NAAM	WATTAGE	MILIAMPER	TYPE DIMMING	AANSLUITING	AANTAL LICHTBRONNEN
16.8101.0350.E	DRIVER P&P	10,5W – 14,7W	350mA	Fase af/triac dimbaar	2m kabel eurostekker	1
16.8101.0350.G	DRIVER P&P	10,5W – 14,7W	350mA	Fase af/triac dimbaar	2m kabel GST18 P3	1
16.8101.0350.W	DRIVER P&P	10,5W – 14,7W	350mA	Fase af/triac dimbaar	2m kabel WINSTA P3	1
16.7001.0350.G	DRIVER DALI INTEL P&P	4W – 18W	350mA	DALI CTA/AM dimbaar	2m GST18 kabel 5P	1
16.7001.0350.W	DRIVER DALI INTEL P&P	4W – 18W	350mA	DALI CTA/AM dimbaar	2m WINSTA kabel 5P	1
16.7001.0350.Z	DRIVER DALI INTEL P&P	4W – 18W	350mA	DALI CTA/AM dimbaar	excl. prim. connector kabel 5P	1
16.7103.0350.G	DRIVER DALI MULTI MAXI P&P	4W – 39W	350mA	DALI CTA/AM dimbaar	2m GST18 kabel 5P	1 – 2
16.7103.0350.W	DRIVER DALI MULTI MAXI P&P	4W – 39W	350mA	DALI CTA/AM dimbaar	2m WINSTA kabel 5P	1 – 2
16.7103.0350.Z	DRIVER DALI MULTI MAXI P&P	4W – 39W	350mA	DALI CTA/AM dimbaar	excl. prim. connector kabel 5P	1 – 2
16.7906.0350.E	DRIVER 1-10V TOP P&P	3,5W – 18,9W	350mA	1-10V CTA/AM dimbaar	2m eurostekker kabel	1
16.7906.0350.G	DRIVER 1-10V TOP P&P	3,5W – 18,9W	350mA	1-10V CTA/AM dimbaar	2m GST18 kabel	1
16.7906.0350.W	DRIVER 1-10V TOP P&P	3,5W – 18,9W	350mA	1-10V CTA/AM dimbaar	2m WINSTA kabel	1
16.7903.0350.E	DRIVER 1-10V MULTI MAXI P&P	7W – 39,2W	350mA	1-10V CTA/AM dimbaar	2m eurostekker kabel	1 – 2
16.7903.0350.G	DRIVER 1-10V MULTI MAXI P&P	7W – 39,2W	350mA	1-10V CTA/AM dimbaar	2m GST18 kabel 3P	1 – 2
16.7903.0350.W	DRIVER 1-10V MULTI MAXI P&P	7W – 39,2W	350mA	1-10V CTA/AM dimbaar	2m WINSTA kabel 3P	1 – 2




E: Europlug
G: GST18
W: Winsta
Z: Geen plug




AANSLUITEN VAN PALOMA MET P&P CONNECTOR / CONNECTING PALOMA WITH P&P CONNECTOR

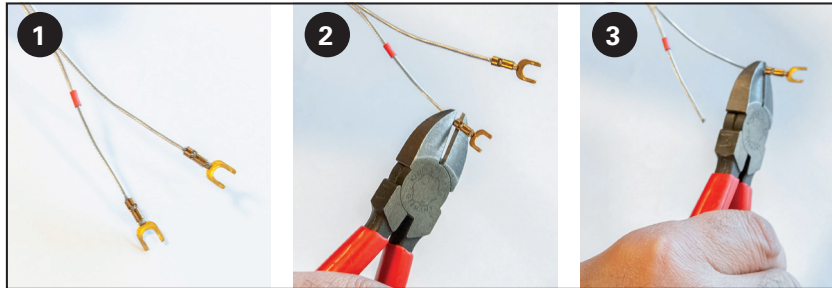


Knip de twee vorkjes af met een kniptang, ga naar stap 7 als de kabels geen vorkjes hebben en gestript zijn.
Cut off the two forks with a wire cutter, go to step 7 if the cables do not have forks and are stripped.

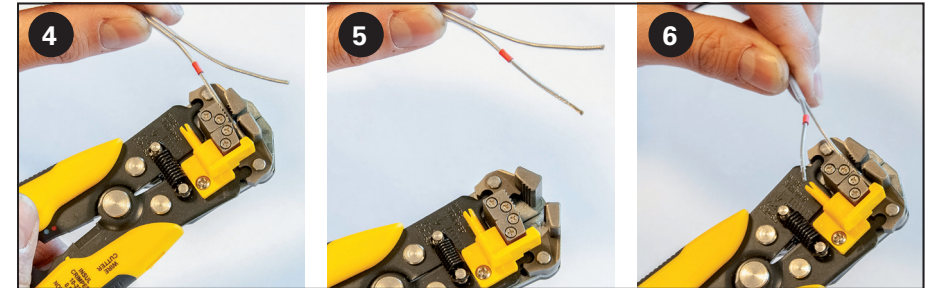



Beide kabels strippen met een striptang, pas op dat de isolatie van de draden niet wordt beschadigd bij het strippen.
Strip both cables with a stripping tool, making sure that the insulation of the wires is not damaged when stripping.

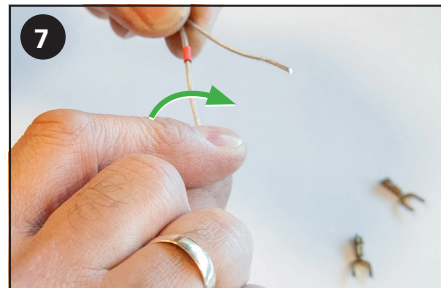


Draai de uiteinden van de koperdraden om ze glad te maken.
Twist the ends of the copper wires to make them smooth.



AANSluiten: Indrukken en kabel invoeren.
CONNECT: Press and insert the cable.



LOS KOPPELEN: Indrukken en dan kabel eruit trekken.
DISCONNECT: Push and remove cable.



LET OP:

- Volg en bewaar deze gebruiksaanwijzing.
- Zorg ervoor dat de netspanning uitgeschakeld is voor installatie, reparatie of onderhoud.
- (Installatie, reparatie en onderhoud uitsluitend door gekwalificeerde personen).
- Voor reparatie of onderhoud uitsluitend originele delen gebruiken.
- Gebruik het product alleen binnenshuis.

De fabrikant aanvaardt geen enkele aansprakelijkheid voor letsel of schade als gevolg van een verkeerde toepassing van het armatuur. De fabrikant aanvaardt geen garantie in geval van het niet behandelen van de lampen volgens de richtlijnen van de fabrikant. Als er schade aan elektrische onderdelen te vinden zijn, vraag dan een elektricien om het te vervangen.

Onderhoud is behoud:

Een goede instandhouding van het armatuur is sterk afhankelijk van omgevings- en onderhoudsfactoren. Hierop kunnen wij geen invloed uitoefenen.

NOTE:

- Follow and keep this instructions manual.
- Make sure that the mains voltage is switched off for installation, repair or maintenance.
- (Installation, repair and maintenance only by qualified persons).
- Use only original parts for repairs or maintenance.
- Use the product only indoors.

The manufacturer accepts no liability for any injuries or damages resulting from the incorrect use or installation of the fixture. Any operation performed on the fixture that is not in accordance with instructions will void manufacturer's warranty. If you find any damage to the electrical parts, please ask a qualified electrician to replace it.

Maintenance is preservation:

A good preservation of the fixture is highly dependent on environmental factors and maintenance. We cannot exercise any influence on this.

"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."