



Maretti Lighting  
Bolderweg 7

1332 AX Almere  
the Netherlands

T +31 (0) 36 532 66 12

E info@maretti.com  
W www.maretti.com

Maretti Lighting is well-known in the World of interior design. In businesses, homes, store chains, and hospitality facilities all over the world, Maretti is unmistakable present with its project lighting that does more than just provide light. We make lighting an essential part of the interior. Maretti stands for stylish top quality and trendsetting design, modern, timeless and most of all, original.

Maretti Lighting works with all the top brands in the lighting industry, but we are especially notable for our own large product line and introduce our own brand name "Maretti". Our production team distinguishes itself time and time again with unique innovations from our own atelier and therefore our projects exude an entirely unique identity.

© Copyright Maretti Projectverlichting.

Our IM was made with the greatest of care. Nevertheless, the colours displayed in the IM may differ slightly from the real colours because of the printing process. Colour, size and range are subject to change. Nothing from this IM may be copied, reproduced and/or published by print, photocopy or in any other way without Maretti Lighting's written permission. All product and design copyrights belong to Maretti Lighting.

#### GUARANTEE TERMS AND CONDITIONS

The other party should inspect the delivered items immediately upon receipt with regard to its soundness. Entitlements to repair or replacement only exist if the other party

- In the case of visible defects, informs MPV of them immediately.

- In the case of defects that are not visible, informs MPV in writing of the defects, within 2 working days after the day the defects were found, or in all reason could have been found and furthermore demonstrates that the MPV instructions for use, maintenance and operation were followed, whilst the defects are not the consequence of normal wear and tear, misuse, negligence, accident, exceeding the limits prescribed by the MPV or by the legal safety regulations, or, in the case of a repair or change without MPV's consent or the consent of its recognised repairer, there will be no entitlement to repairs or replacement. The parts that have to be replaced must be made available free of charge to MPV. Noncompliance by the other party to one or more of its obligations will release MPV of all its guarantee obligations. In the case of assembly of the other party's own products by Maretti, MPV will release itself from all guarantee stipulations.


Moreover, our general delivery terms and conditions are applicable. These can be obtained from Maretti or can be downloaded from [www.maretti.com](http://www.maretti.com)




The installation must be done by a competent installer. Maretti recommends that your (outside) lighting and fixtures are inspected and maintained annually.

D: Für Garantiebedingungen bitte lesen Sie unsere Webseite [www.maretti.com](http://www.maretti.com)  
E: Consulte nuestro sitio web para los condiciones de garantía [www.maretti.com](http://www.maretti.com)  
FR: Consultez notre site web pour les conditions de garantie [www.maretti.com](http://www.maretti.com)  
NL: Voor garantievoorwaarden zie onze website [www.maretti.com](http://www.maretti.com)


21.8263.93

PERU G9 LED  
G9



230V	VOLTAGE	0,9	POWER-FACTOR	250 lm	LUMEN	25.000 hours	LED NOMINAL LIFETIME*		
2,4W	WATTAGE		DIMMABLE*	<0.4	SVM		CE MARK		
0W	STANDBY POWER	90	CRI	<1	PstLM				
	G9 SOCKET	2700K	KELVIN	360°	DEGREE BEAM ANGLE				

\*FASE AFSNIJ DIMBAAR - TRAILING EDGE DIMMABLE

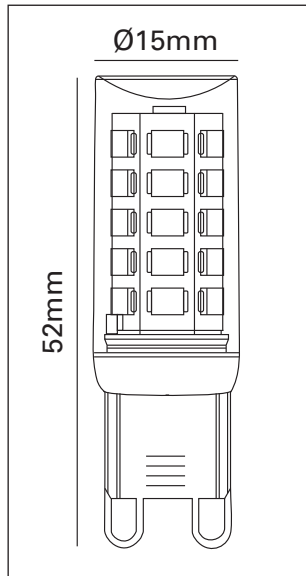

#### OPTIMALE PRESTATIES EN EEN LANGERE LEVENSDUUR DANKZIJ GEAVANCEERDE TECHNOLOGIE

Deze lichtbron is uitgerust met **Over Temperature Protection (OTP)**, een slimme beveiliging die ervoor zorgt dat de temperatuur altijd onder controle blijft. Wordt de lichtbron te warm? Geen zorgen! Hij dimt automatisch terug naar een veilig niveau en keert daarna weer terug naar 100% helderheid. Dit voorkomt oververhitting en verlengt de levensduur aanzienlijk.

#### OPTIMAL PERFORMANCE AND EXTENDED LIFESPAN WITH ADVANCED TECHNOLOGY

This light source is equipped with **Over Temperature Protection (OTP)**, a smart safeguard that ensures temperature control at all times. If the light source gets too warm—no worries! It automatically dims to a safe level and then returns to 100% brightness once conditions are optimal. This prevents overheating and significantly extends its lifespan.

**\*Nominale levensduur LED:** De gebruiksomstandigheden hebben een grote invloed op de levensduur. Belangrijke factoren: omgevingstemperatuur, schakelfrequentie, vochtigheid, trillingen en spanning.

**\*LED Nominal Lifetime:** Usage conditions greatly impact lifespan. Key factors: ambient temperature, switching frequency, humidity, vibrations, and voltage.

#### MAXIMAAL AANTAL ARMATUREN PER GROEP (OP BASIS VAN INSCHAKELSTROOM) MAXIMUM NUMBER OF LUMINAIRES PER CIRCUIT (BASED ON INRUSH CURRENT)


Inschakelstroom in verlichting verwijst naar de tijdelijke, vaak aanzienlijk hogere stroom die door een armatuur loopt op het moment dat deze wordt ingeschakeld. Dit komt doordat LED-lichtbronnen bij het opstarten een hoge piekstroom nodig hebben voordat zij hun normale bedrijfsstatus bereiken.

Inrush current in lighting refers to the temporary, often significantly higher current that flows through a luminaire when it is switched on. This occurs because LED light sources require a high peak current at start-up before reaching their normal operating state.

Inschakelstroom Inrush Current	Max. aantal (10A B) Max. Qty (10A B)	Max. aantal (16A B) Max. Qty (16A B)	Max. aantal (25A B) Max. Qty (25A B)
0.6A	400	640	1000

*Waarden zijn indicatief en gebaseerd op B-karakteristiek installatieautomaten.  
Werkelijke prestaties kunnen variëren afhankelijk van de installatie.*

*Values are indicative and based on B-curve circuit breakers.  
Actual performance may vary depending on installation conditions.*

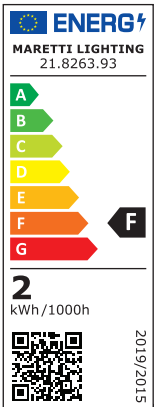

#### LET OP:

- Volg en bewaar deze gebruiksaanwijzing.
- Zorg ervoor dat de netspanning uitgeschakeld is voor installatie, reparatie of onderhoud. (Installatie, reparatie en onderhoud uitsluitend door gekwalificeerde personen).
- Voor reparatie of onderhoud uitsluitend originele delen gebruiken.
- Gebruik het product alleen binnenshuis.

De fabrikant aanvaardt geen enkele aansprakelijkheid voor letsel of schade als gevolg van een verkeerde toepassing van het armatuur. De fabrikant aanvaardt geen garantie in geval van het niet behandelen van de lampen volgens de richtlijnen van de fabrikant. Als er schade aan elektrische onderdelen te vinden zijn, vraag dan een elektricien om het te vervangen.

#### Onderhoud is behoud:

Een goede instandhouding van het armatuur is sterk afhankelijk van omgevings- en onderhoudsfactoren. Hierop kunnen wij geen invloed uitoefenen.

#### NOTE:

- Follow and keep this instructions manual.
- Make sure that the mains voltage is switched off for installation, reparation or maintenance. (Installation, reparation and maintenance only by qualified persons).
- Use only original parts for repairs or maintenance.
- Use the product only indoors.

The manufacturer accepts no liability for any injuries or damages resulting from the incorrect use or installation of the fixture. Any operation performed on the fixture that is not in accordance with instructions will void manufacturer's warranty. If you find any damage to the electrical parts, please ask a qualified electrician to replace it.

#### Maintenance is preservation:

A good preservation of the fixture is highly dependent on environmental factors and maintenance. We cannot exercise any influence on this.

"No rights can be derived from the information provided on this Instruction Manual. Information on the Instruction Manual has been compiled with the utmost care and is updated on a continuous basis. Nevertheless Maretti cannot guarantee that all information is free of errors, complete or fully up to date."